



C Range | undercounter




C351

C401

C451

C501 & C515 WSD

- n ■ 2 year warranty
- n ■ Bright LED display with soft touch controls
- n ■ Accurate detergent and rinse aid peristaltic dosing as standard
- n ■ Supplied with two open cup/glass racks
- n ■ Three selectable cycle options plus further options on 500mm rack models
- n ■ Cycle times can be tailored to site requirements
- n ■ Selectable energy saving mode
- n ■ Selectable thermostop ensures optimum rinse temperatures
- n ■ Automatic self-cleaning at end of service
- n ■ Surface scrap tray filters on 450 & 500mm rack models
- n ■ Operational self-diagnostics
- n ■ Twin traffic light display indicates machine status
- n ■ Drain pump optional on all models
- n ■ All C500 type models are partial double skinned reducing noise and heat loss
- n ■ C515 WSD with automatic water softener, breaktank and drain pump as standard and supplied with one pegged and one open rack

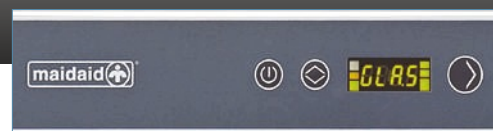

Technical

- n ■ Standard voltage 240V – single phase
- n ■ 500mm rack models can be supplied for 3 phase
- n ■ Suitable for hot (max 50°C) or cold* water supply at 2 to 4 bar dynamic supply pressure
- n ■ Wash temperature 60°C (adjustable)
- n ■ Rinse temperature 65°C (adjustable)
- n ■ Cycle times between 70 & 240 secs, dependent on model

Drain pump versions require a waste up-stand for correct operation.

Restrictive waste connections should be avoided for all installations.

*Machines fitted to cold water supplies will not be capable of running repeated short cycles, the cycle time will automatically be extended to allow recovery of correct operating temperatures.

Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Options	Power kW	Amps Required
C351	350	255	400 x 480 x 630 [#]	3 Cycles	2.9	13
C351D			As C351 above with fitted drain pump			
C401	390	295	440 x 540 x 675 [#]	3 Cycles	2.9	13
C401D			As C401 above with fitted drain pump			
C451	450	260	530 x 560 x 700 [#]	3 Cycles	2.9	13
C451D			As C451 above with fitted drain pump			
C501	500	320	580 x 610 x 815 [#]	3 Cycles	2.6/4.5/6.5	13/20/30 ^{##}
C501D			As C501 above with fitted drain pump			
C515 WSD	500	320	580 x 610 x 815 [#]	3 Cycles	2.6/4.5/6.5	13/20/30 ^{##}

Height excludes adjustable feet which will add 10 to 20mm.

Machines will be supplied for 30 amp supply as standard, if 13 or 20 amp ordered they will be supplied with original cable and without plug. Standard 13 amp UK 3 pin plugs will be **unsuitable** for cable supplied.