

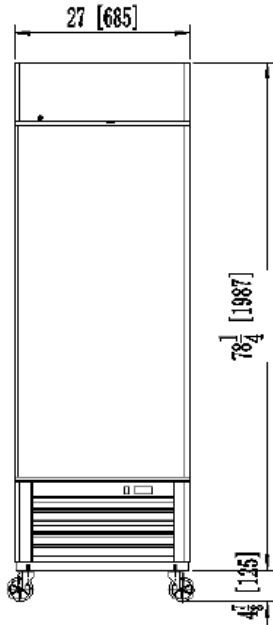


ICE8950

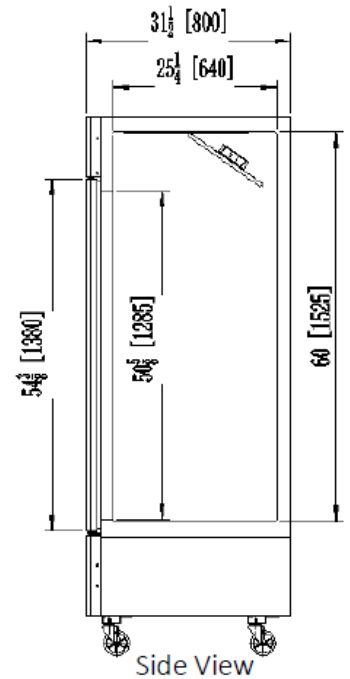

ICE8960

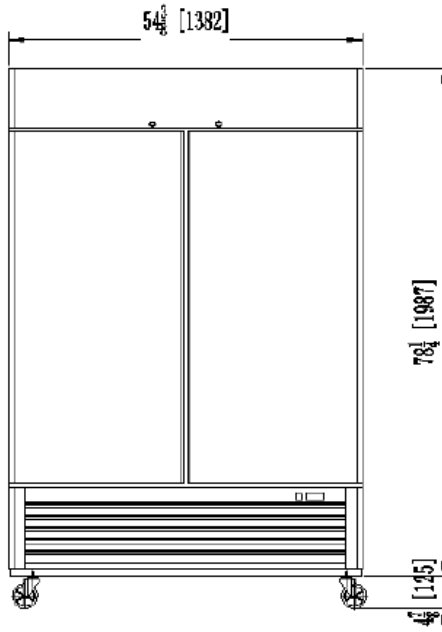

Uprights

Classification	ICE8950	ICE8960
Exterior Dimension (WxDxH mm)	685 x 800 x 2112	1382 x 800 x 2112
Interior Dimension (WxDxH mm)	565 x 640 x 1525	1262 x 640 x 1525
Packing Dimension (WxDxH mm)	740 x 860 x 2260	1436 x 860 x 2260
Shelf Dimension (WxDxH mm)	620 x 530	620 x 530
Shelf Quantity	4	8
Loading Capacity Per Shelf (kg/pcs)	39	39
Capacity (Litre)	580	1300
Net Weight (kg)	110	180
Gross Weight (kg)	120	190
Voltage (V/Hz/Ph)	220/50/1	220/50/1
Power (W)	320	400
Electric Current (A)	1.7	2.2
Power Consumption (kw/24h)	2.5	3.7
Defrost Method	Air Defrost	Air Defrost
Climatic Class	4	4
Energy Label Grade	D	D
Refrigerant Amount (g)	120g	100g
Refrigerant	R600a	R290hc
Cooling Method	Fan Assisted	Fan Assisted
Inner Temperature (°C)	-5°C to +5°C	-5°C to +5°C
Insulation Thickness (mm)	60	60
Foaming Material	C5H10	C5H10
Castors	4 (2 braked on front)	4 (2 braked on front)
Stainless Steel Interior and Exterior	Yes	Yes

